


N SERIES

VIDEO CONNECTORS

ELECTRICAL SPECIFICATIONS

CHARACTERISTIC IMPEDANCE 75OHM, ALTHOUGH NOT INTERRCHARGEABLE WITH STANDARD 50OHM MODELS. N CONNECTORS DESIGNED FOR NORMAL IMPENDENCE 50 OHM CAN BE USED IN CONSIDERABLY HIGH IMPENDANCE MATCHING.THEY ARE AVAILABLE FOR CHARACTERISTIC IMPEDANCE 75OHM, ALTHOUGH NOT INTERRCHARGEABLE WITH STANDARD 50OHM MODELS.

- | | |
|--------------------------|------------------------------|
| STANDARD CROSS REFERENCE | : MIL-C-71A,39012,JIS-C-5411 |
| VOTAGE RATING | : AC 500V. |
| WITHSTANDING VOLTAGE | : AC 1,000V ONE MINUTE |
| INSULATION RESISTANCE | : 1000M Ω MIN AT DC 500V |
| CONTACT RESISTANCE | : 3M Ω MAX AT DC 1A |
| FREQUENCY RANGE | : 0-4000GHz |
| VSWR | :1.2MAX 0-4 GHz |

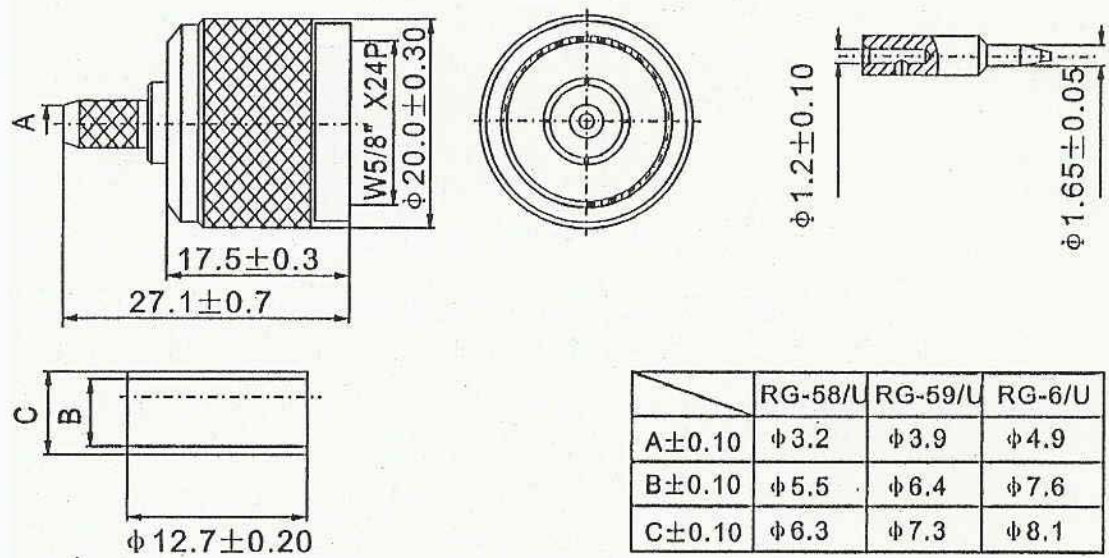

	RG-58/U	RG-59/U	RG-6/U
A±0.10	φ 3.2	φ 3.9	φ 4.9
B±0.10	φ 5.5	φ 6.4	φ 7.6
C±0.10	φ 6.3	φ 7.3	φ 8.1